

Material

Profiled EPDM rubber
For use with standard lock rings

Sizes


80mm to 300mm diameter

Note

Made from EPDM rubber and used to complete a seal when using our Standard Lock Rings (Code SL). Only one seal is used per connection. The seal is placed over the bead on SpeedLock Duct prior to assembly. Hardness is 80° shore and tolerates temperatures from -40° to 100°.

Duct End Seals

Code *DES*

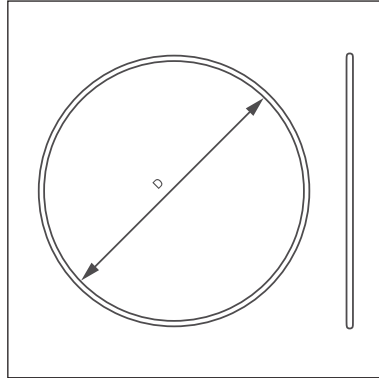

Dimensional specifications are given in the table below

Dimensional Specifications

PRODUCT CODE	D mm
DES080	80
DES100	100
DES120	120
DES125	125
DES140	140
DES150	150
DES160	160
DES180	180
DES200	200
DES225	225
DES250	250
DES275	275
DES300	300