**Material**

Thermoplastic rubber coated-polyester fabric

Wall Thickness

0.4mm

Colour

Black

Single Length

10m rolls / cut lengths to order

Temperature Resistance

- 40° up to + 150° C

Applications

Suction of exhaust fumes, chemical fumes and gases even under mechanical influence

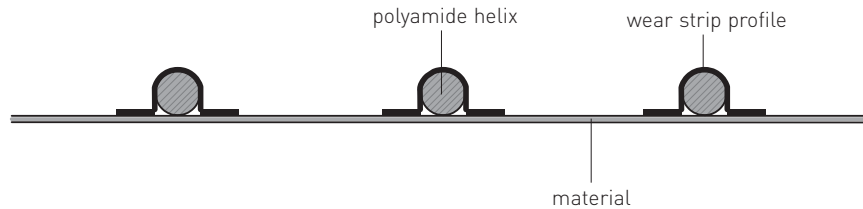
Properties

- very good chemical resistance to fumes of acids and solvents UV and ozone resistant
- rot proofed
- withstands severe flexing
- compatible with over floor reel systems
- fully crush recoverable

Eximo speedLOCK™ since 1984

ExFlex

Light weight and very flexible THERMOPLASTIC RUBBER ducting

**Technical Data**

Further diameters available upon request.
Technical data are based on +20°C.

PRODUCT CODE	Weight kg/m	Bend Rad mm	Mat. Thickness mm	Max Vacuum bar
EXFLEX052	0.41	85	0.4	0.50
EXFLEX063	0.53	100	0.4	0.35
EXFLEX076	0.69	105	0.4	0.15
EXFLEX102	0.87	190	0.4	0.10
EXFLEX127	1.20	250	0.4	0.08
EXFLEX152	1.44	300	0.4	0.06