**Material**

Thermoplastic rubber coated-polyester fabric

**Wall Thickness**

0.4mm

**Colour**

Black

**Single Length**

10m rolls / cut lengths to order

**Temperature Resistance**

- 40° up to + 150° C

**Applications**

Suction of exhaust fumes, chemical fumes and gases even under mechanical influence


**Properties**

- very good chemical resistance to fumes of acids and solvents UV and ozone resistant
- rot proofed
- withstands severe flexing
- compatible with over floor reel systems
- fully crush recoverable



## ExFlex

Light weight and very flexible THERMOPLASTIC RUBBER ducting

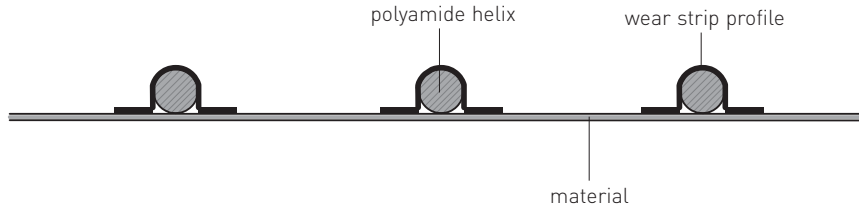

## Technical Data

Further diameters available upon request.  
Technical data are based on +20°C.

PRODUCT CODE	Weight kg/m	Bend Rad mm	Mat. Thickness mm	Max Vacuum bar
EXFLEX052	0.41	85	0.4	0.50
EXFLEX063	0.53	100	0.4	0.35
EXFLEX076	0.69	105	0.4	0.15
EXFLEX102	0.87	190	0.4	0.10
EXFLEX127	1.20	250	0.4	0.08
EXFLEX152	1.44	300	0.4	0.06

