**Material**

Polyurethane
thickness 1.4mm

Wall Thickness

1.4mm

Colour

Clear with a green helix

Single Length

10m rolls / cut lengths to order

Temperature Resistance

- 40° up to + 100° C

Superior Technology

GranuFlex contains a unique organic compound which is added to the Polyurethane and attracts airborne moisture to create a continuous circuit that removes static build up as product moves through the duct. GranuFlex does not lose its antistatic properties as it wears and the helix does not require grounding

Applications

Suction and discharging of abrasive materials, especially in the grain and plastics industries


Properties

- antistatic $\Omega < 10^8$ ohms
- very smooth bore
- excellent abrasion resistance
- resistant to oil and petrols
- non toxic
- free of halogen and softeners

Eximo speedLOCK™ since 1984

GranuFlex

Heavy weight and flexible polyurethane ducting

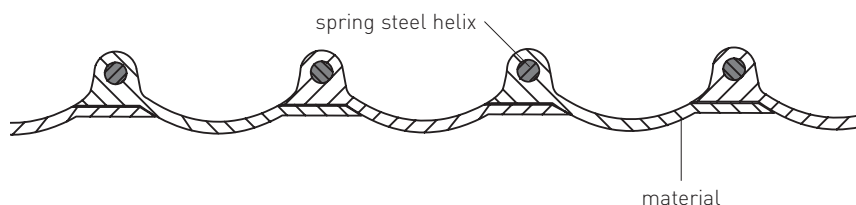

Technical Data

Further diameters available upon request.
Technical data are based on +20°C.

PRODUCT CODE	Weight kg/m	Bend Rad mm	Max work Pressure bar	Max Vacuum bar
GRANUFLEX040	0.56	60	2.3	0.70
GRANUFLEX050	0.67	75	1.9	0.60
GRANUFLEX060	0.79	90	1.8	0.55
GRANUFLEX100	1.36	150	1.1	0.40
GRANUFLEX150	1.82	225	0.7	0.20