**Material**

Polyurethane  
thickness 1.4mm

**Wall Thickness**

1.4mm

**Colour**

Clear with a green helix

**Single Length**

10m rolls / cut lengths to order

**Temperature Resistance**

- 40° up to + 100° C

**Superior Technology**

GranuFlex contains a unique organic compound which is added to the Polyurethane and attracts airborne moisture to create a continuous circuit that removes static build up as product moves through the duct. GranuFlex does not lose its antistatic properties as it wears and the helix does not require grounding

**Applications**

Suction and discharging of abrasive materials, especially in the grain and plastics industries


**Properties**

- antistatic @  $< 10^8$  ohms
- very smooth bore
- excellent abrasion resistance
- resistant to oil and petrols
- non toxic
- free of halogen and softeners



## GranuFlex

*Heavy weight and flexible polyurethane ducting*

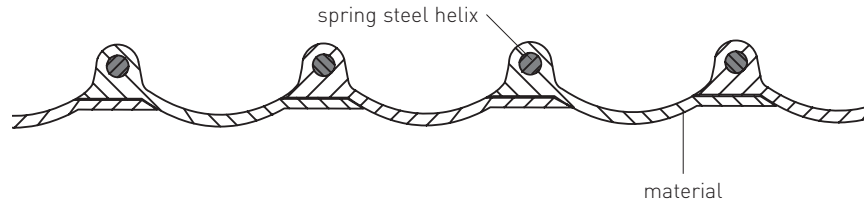

### Technical Data

Further diameters available upon request.  
Technical data are based on +20°C.

PRODUCT CODE	Weight kg/m	Bend Rad mm	Max work Pressure bar	Max Vacuum bar
GRANUFLEX040	0.56	60	2.3	0.70
GRANUFLEX050	0.67	75	1.9	0.60
GRANUFLEX060	0.79	90	1.8	0.55
GRANUFLEX100	1.36	150	1.1	0.40
GRANUFLEX150	1.82	225	0.7	0.20



Sydney Sales +61 2 9677 2366 (1300 138 038)

[www.eximo.com.au](http://www.eximo.com.au)

[email: sales@eximo.com.au](mailto:sales@eximo.com.au)