**Material**

Silicone coated glass fabric

**Wall Thickness**

0.4mm

**Colour**

Silver-grey

**Single Length**

10m rolls / cut lengths to order

**Temperature Resistance**

- 60° C to + 300° C.

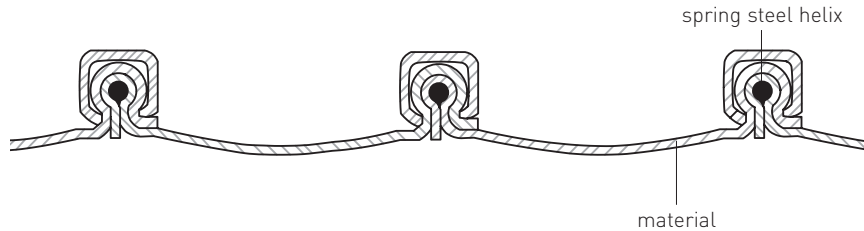
**Applications**

Suction of hot fumes, gases or dusts in all fields of industry

**Properties**

- excellent temperature resistance
- flame retardant
- abrasion resistance outer helix
- excellent axial compressibility

## HotFlex

*Light weight and very flexible silicone ducting*

### Technical Data

Further diameters available upon request.  
Technical data are based on +20°C.

PRODUCT CODE	Weight kg/m	Bend Rad mm	Max work Pressure bar	Max Vacuum bar
HOTFLEX052	0.40	30	0.85	0.32
HOTFLEX063	0.50	37	0.49	0.15
HOTFLEX076	0.60	45	0.47	0.14
HOTFLEX1020	0.65	60	0.30	0.08
HOTFLEX127	0.80	75	0.21	0.05
HOTFLEX152	0.90	90	0.16	0.04
HOTFLEX180	1.00	108	0.12	0.02
HOTFLEX203	1.21	120	0.10	0.02
HOTFLEX254	1.70	175	0.07	0.01
HOTFLEX305	2.13	210	0.05	0.01
HOTFLEX406	3.10	280	0.03	0.01

