


PolyFlex® Heavy EL

*Heavy weight & flexible Polyether-Polyurethane ducting
Electrically Conductive*

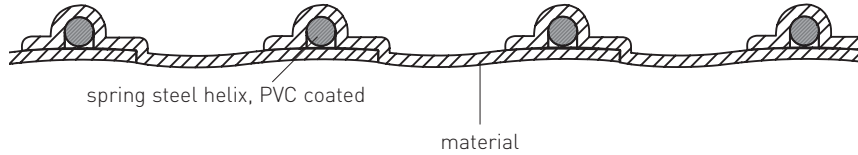

Technical Data

Dia. (mm)	Weight (kg/m)	Wall Thickness (mm)	Bend. Radius (mm)	max. Work.Press. (bar)	max. Vacuum (bar)
152	1,62	1,1	225	0,50	0,20

Material:
Black Polyether-Polyurethane

Temperature Resistance:
- 40° up to +100° C

Applications:
Suction of abrasive materials, transport of granules, for explosion-endangered areas

Properties:
Electrically conductive ($R \leq 10.4 \text{ Ohm}$), conform to TRBS 2153 and ATEX- directive 94/9/EC, resistant to hydrolysis and microbes, solid construction, good resistance to oil and petrols, excellent abrasion resistance, smooth bore, free of halogen and softeners, good flexibility.

Further diameters available upon request. Technical data are based on + 23° C.

