




## Suntuflex™

Very flexible, single ply Neoprene®-coated-polyester fabric ducting

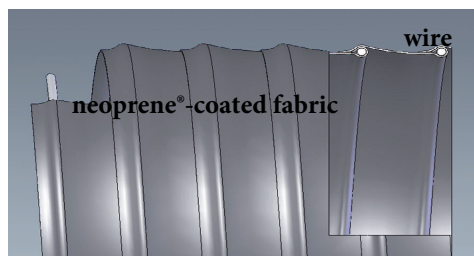

### Technical Data

Dia. mm	Weight kg/m	Mat. Thickness mm	Bend. Rad. mm	Max. Work. Press. bar	Max. Vacuum bar
50	0,30	0,40	50	0,80	0,20
60	0,36	0,40	60	0,80	0,16
70	0,42	0,40	70	0,70	0,14
75	0,45	0,40	75	0,60	0,10
80	0,50	0,40	80	0,60	0,09
100	0,57	0,40	100	0,50	0,08
120	0,68	0,40	120	0,50	0,08
125	0,71	0,40	125	0,50	0,07
140	0,79	0,40	140	0,30	0,06
150	1,01	0,40	150	0,20	0,06
175	1,18	0,40	175	0,20	0,05
200	1,20	0,40	200	0,20	0,04
250	1,25	0,40	250	0,15	0,03
300	1,39	0,40	300	0,10	0,02
350	2,77	0,40	350	0,06	0,02
400	3,16	0,40	400	0,04	0,01
450	3,56	0,40	450	0,03	0,01
500	3,96	0,40	500	0,03	0,01

Further diameters available upon request  
Technical data based on +20°C

#### Material:

Neoprene®-coated-polyester fabric.

#### Colour:

Black.

#### Single Length:

10mt roll

#### Temperature Resistance:

- 55° up to + 120° C.

#### Applications:

Suction and conveyance of air, fumes and gases,  
Air-conditioning and ventilation.

#### Properties:

Flame retardant according to UL 94V-0, excellent UV-resistance, rot-proof, maintains flexibility at low temperatures, good chemical resistance.