


YellowBelly

Light weight and flexible high vacuum polyethylene ducting

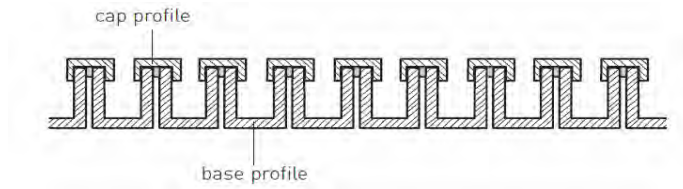

Dia. (mm)	Weight (kg/m)	Wall Thickness (mm)	Bending radius (mm)	Max. Work. Press. (bar)	Max. Vacuum (bar)
52	0,68	1,3	76	1,00	0,85
63	0,85	1,3	95	0,66	0,85
76	0,97	1,3	114	0,47	0,85
102	1,91	2,0	152	0,33	0,85
152	2,80	2,0	304	0,33	0,85

Further diameters available upon request.
Technical data are based on +20°C.

Material

Polyethylene

Colour

Yellow-black

Single Length

10m rolls other lengths available on order

Temperature Resistance

-40° up to +60°C

Applications

Suction and conveyance of liquids and materials especially in sanitary, sewer pumping and heavy duty industrial

Connectors

A full range of camlocks and bauer couplings available

Properties

- Fully crush recoverable
- Excellent chemical resistance
- Light weight
- Good flexibility
- Good compressibility
- Outer wearstrip profile